

CALEO - X2



DE

Caleo-X2 | Wand-/ Deckenleuchte direktstrahlend mit indirekter Lichtkorona

- Alternative Optik-Varianten:
 - Microprismenoptik aus mikrostrukturiertem Spezialacrylglas geeignet für Bürobeleuchtung gemäß EN 12464-1
 - Opal-Diffusor aus opalem, mattiertem Acrylglas geeignet für Allgemeinbeleuchtung
- Oberfläche wahlweise in matt weißem (RAL9003) oder silbernem (RAL9006) Strukturlack
- Leuchtenkörper aus Aluminium-Strangpress-Profil ohne sichtbare Schweißnaht
- Elektronische Konverter und Vorschaltgeräte wahlweise einfach schaltbar oder dimmbar
- LED: Farbtemperatur wahlweise 3000°K oder 4000°K; Farbwiedergabe Ra>80
- Optional: Notlicht-Ausführung, Sonder-LED-Farbtemperaturen (2700°K – 7000°K), Sonderfarben

EN

Caleo-X2 | Surface mounted luminaire with direct light distribution and indirect lighting corona

- Alternative optic versions:
 - Microprismatic screen made of micro-structured special methacrylate suitable for office lighting according to EN 12464-1
 - Opal-Diffuser made of mat opal methacrylate, suitable for general lighting
- Surface optionally mat white (RAL9003) or silver (RAL9006) powder-coated
- Luminaire body made of aluminum profile without visible seam
- Electronic converter and ballasts optionally one-step switchable or dimmable
- LED: Colour temperature optionally 3000°K or 4000°K; colour rendering Ra>80
- Optional: Emergency components, special LED colour-temperature (2700°K – 7000°K), special colour

Verwandte Produkte | Related products :




CALEO-S2 84




CALEO-W3 132



CALEO-W4 MINI 134



CALEO-P1 230



CALEO-M2 404

Download-Center:




DE



EN

CALEO-X2 [LED]: MICROPRISMEN-OPTIK | MICROPRISMATIC SCREEN

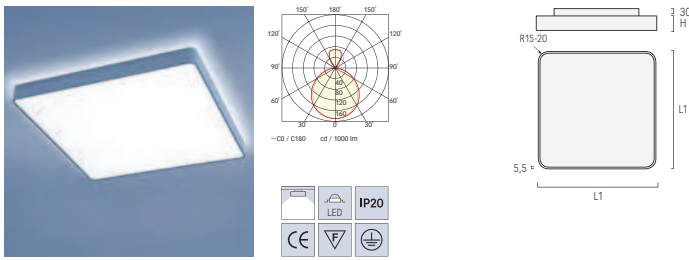


L1	H	LUMEN/WATT@4000°K*	ART-NR. CODE	ART-NR. CODE	KG
			SILBER SILVER	WEISS WHITE	
314	55	1780lm/20W	AX2ASE-###M-Q300	AX2AWE-###M-Q300	2,7
414	55	3380lm/38W	AX2ASE-###M-Q400	AX2AWE-###M-Q400	3,6
514	55	5290lm/56W	AX2ASE-###M-Q500	AX2AWE-###M-Q500	5,1
614	55	7190lm/73W	AX2ASE-###M-Q600	AX2AWE-###M-Q600	6,3
900	75	13920lm/140W	AX2ASE-###M-Q900	AX2AWE-###M-Q900	8,9

*Gesamt-Leuchtenlichtstrom & Leistungsaufnahme bei 4000°K | Luminaire luminous flux & power consumption at 4000°K

CONTROL	E: NON DIMMABLE, D: DIM 1-10V, L: DIM DALI, H: TOUCH-DIM
LED COLOUR TEMPERATURE ###	830: 3000°K, 840: 4000°K


CALEO-X2 [T5]: MICROPRISMEN-OPTIK | MICROPRISMATIC SCREEN

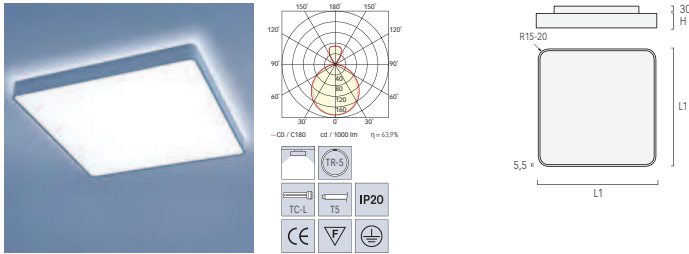

L	H	LEUCHTMITTEL LAMPS	ART-NR. CODE	ART-NR. CODE	KG
			SILBER SILVER:	WEISS WHITE	
270	75	TR-5 1x22 W	AX2ASER-122	AX2AWER-122	2,5
270	75	TC-L 2x18 W	AX2ASEL-218	AX2AWEL-218	2,5
370	75	TR-5 1x22+40 W	AX2ASER-122-40	AX2AWER-122-40	3,5
370	75	TR-5 1x40 W	AX2ASER-140	AX2AWER-140	3,4
370	75	TR-5 1x55 W	AX2ASER-155	AX2AWER-155	3,4
470	75	TR-5 1x60 W	AX2ASER-160	AX2AWER-160	4,8
470	75	TR-5 1x40+60 W	AX2ASER-140-60	AX2AWER-140-60	4,9
614	75	T5 8x14 W	AX2ASET-814	AX2AWET-814	6,4

CONTROL	E: NON DIMMABLE, D: DIM 1-10V, L: DIM DALI, H: TOUCH-DIM
---------	--

CALEO-X2 [LED]: OPAL-DIFFUSOR | OPAL DIFFUSER

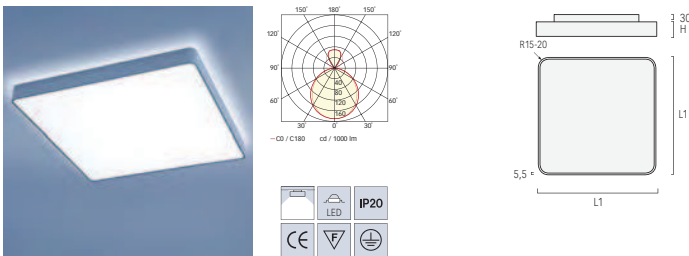


L1	H	LUMEN/WATT@4000°K*	ART-NR. CODE	ART-NR. CODE	KG
			SILBER SILVER	WEISS WHITE	
314	55	1830lm/20W	AX2OSE-###M-Q300	AX2OWE-###M-Q300	2,7
414	55	3430lm/38W	AX2OSE-###M-Q400	AX2OWE-###M-Q400	3,6
514	55	5360lm/56W	AX2OSE-###M-Q500	AX2OWE-###M-Q500	5,1
614	55	7260lm/73W	AX2OSE-###M-Q600	AX2OWE-###M-Q600	6,3
900	75	14080lm/140W	AX2OSE-###M-Q900	AX2OWE-###M-Q900	8,9
1200	75	23040lm/230W	AX2OSE-###M-Q1200	AX2OWE-###M-Q1200	11,0

*Gesamt-Leuchtenlichtstrom & Leistungsaufnahme bei 4000°K | Luminaire luminous flux & power consumption at 4000°K

CONTROL	E: NON DIMMABLE, D: DIM 1-10V, L: DIM DALI, H: TOUCH-DIM
LED COLOUR TEMPERATURE ###	830: 3000°K, 840: 4000°K

CALEO-X2 [T5]: OPAL-DIFFUSOR | OPAL DIFFUSER

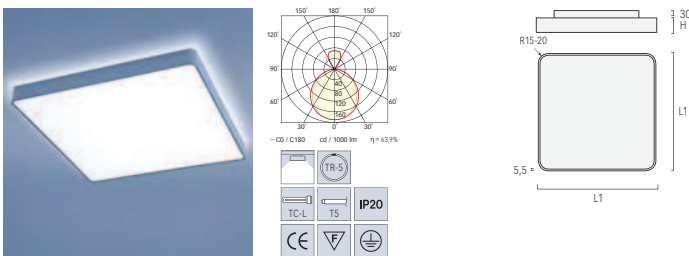

L	H	LEUCHTMITTEL LAMPS	ART-NR. CODE	ART-NR. CODE	KG
			SILBER SILVER:	WEISS WHITE	
270	75	TR-5 1x22 W	AX2OSER-122	AX2OWER-122	2,5
270	75	TC-L 2x18 W	AX2OSEL-218	AX2OWEL-218	2,5
370	75	TR-5 1x22+40 W	AX2OSER-122-40	AX2OWER-122-40	3,5
370	75	TR-5 1x40 W	AX2OSER-140	AX2OWER-140	3,4
370	75	TR-5 1x55 W	AX2OSER-155	AX2OWER-155	3,4
470	75	TR-5 1x60 W	AX2OSER-160	AX2OWER-160	4,8
470	75	TR-5 1x40+60 W	AX2OSER-140-60	AX2OWER-140-60	4,9
614	75	T5 8x14 W	AX2OSET-814	AX2OWET-814	6,4

CONTROL	E: NON DIMMABLE, D: DIM 1-10V, L: DIM DALI, H: TOUCH-DIM
---------	--

Weitere Produktionen | Further Product Options :



Dimmbare Versionen
Dimmable Versions
470



Notlicht-Ausführungen
Emergency Options
474



Alternative Oberflächen
Alternative surfaces
467



LED-Farbtemperatur
LED Colour Temperature
466



Sensortechnik
Sensor Technology
470