


EOS / EOS mini

Recessed Ground Light

IP68 [5m] 15° 25° 40° Power 4.8W Input 12-24VDC Material Aluminium CE

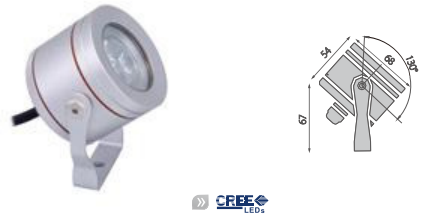

- Creating striking wall effect with focus beam
- P68 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit for long life.
- Stainless steel (316) front face ensures corrosion free outdoor performance in salty damp environment.
- Optional stake mounting offers easy installation and tool free repositioning.



- Body: Anodized Aluminium (Stainless steel 316 material is optional)
- Glass: tempered glass

Order Information

EOS mini 3 LED MODELS (With CREE LED, DC-DC driver / Input 12-24V/DC)

Code	Lumen output	CD	LED Power	System Power	CRI	CCT	BEAM
EOS mini CV-3015	250 lm	2023 cd	4.3 W	4.8 W	83	3000K	15°
EOS mini CV-4015	280 lm	2171 cd	4.3 W	4.8 W	83	4000K	15°
EOS mini CV-3040	250 lm	428 cd	4.3 W	4.8 W	83	3000K	40°
EOS mini CV-4040	280 lm	461 cd	4.3 W	4.8 W	83	4000K	40°
EOS mini CV-3060	250 lm	185 cd	4.3 W	4.8 W	83	3000K	60°
EOS mini CV-4060	280 lm	294 cd	4.3 W	4.8 W	83	4000K	60°


Optional: Linkable model



Glass Style



Installation Stake



EOS Mini CV Outdoor Projector Light Series
Non-Dimmable
Lumen output: 250-280lm



Efficiency: 58 lm/W
Life time: 50,000 hours (70% Lumen maintenance)
3 Years Guarantee

EOS Mini CV

