


Obice - 34° 3000K - Black



IP65 

TECHNICAL DRAWINGS

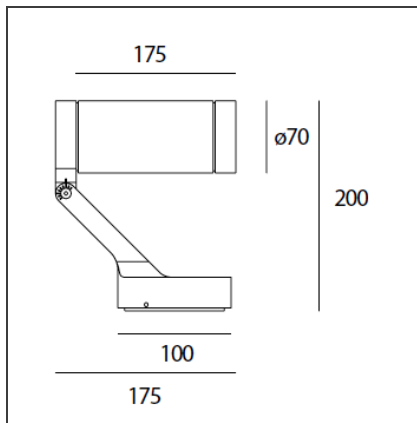

DESIGN BY

Alessandro Pedretti

DESCRIPTION

Lights fixture with high-performance LED light sources. Wall installation. Composed by: body, adjustable joint, terminal board and protective screen. Body in injection mould of aluminium. Terminal base and adjustable joint in injection mould of aluminium. Flange, protection screen in tempered glass, 4mm-thick, with black opal serigraphy. 24Vdc remote driver. White monochromatic LEDs available in 2 colour temperatures: Warm = 3000K Neutral = 4000K Tilting angle +35°/-125° Rotation on horizontal axis: 359°. Wiring to be carried out by means of a plug located in the terminal base. IP Rating IP65. Insulation class I (Obice), insulation class III (Obice mini). Technical features of light fixtures in compliance with EN60598-1. Installation must be carried out by specialized personnel. Carefully follow the instructions.

FEATURES

Article Code:	T430534W10	Material:	Steel, silk screened
Colour:	Black	Series:	glass
Installation:	Wall, Ceiling		Outdoor

DIMENSIONS

Length:	cm 17.5
Height:	cm 20
Weight:	cm 1.2

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Efficacy:	17lm/W
Watt:	10W		
Delivered lumens output (lm):	378lm		
Type:	1		
Class:	A		

LUMINAIRE

Power Supply:	Eelectronic included	Delivered lumens output (lm):	605lm
Watt:	10W	CCT:	3000K
Voltage:	220/240Vac	Efficiency:	54%
		Efficacy:	47lm/W
		CRI:	80
		Dimmer Typology:	-
		Dimmable Typology:	-

ACCESSORIES

Filter holder white
T430600020



Lens for elliptical
emission
T430700000



Filter holder black
T430600010